

## 1. Product Overview:

Read all instructions for installing Drop-In Panels before starting.

Kinetics Drop-In Panels are an out of the box, plug and play acoustic panel, with the fiberoptic star ceiling experience built right in. Out of the box, they are ready to be dropped into any 2' x 2' grid ceiling.

The Kinetics Panel System is designed for easy installation. Each Kinetics star panel has its own low voltage Star Engine built right in and only requires a 12cDC power connection. Up to 50 Kinetics star panels may be daisy chained together which makes wiring and installation a snap.


Each Kinetics system starts with a Driver (power supply) that is connected to a switched, or controlled line volt- age circuit. From the Driver, a Leader Cable carries the low voltage power to the Kinetics Panel System. Then Jumper Cables daisy chain the power from one panel to the next. For installations with more than 50 star panels, just keep adding additional Drivers and Leader Cables to the same switched circuit.

Drop-In Panels come in one standard size at this time, and custom sizes are available at an additional cost, and longer lead time. The standard Kinetics Drop-In panel is 24 x 24 inches square and is made with 2 inches of premium 3 pound fiberglass, with the desired matte black finish.

## 2. Design Overview:

Plan your installation based on your design. These instructions are for general guidelines, and your installation requirements may vary based on your design and job site conditions.

Ideas for configuring a star ceiling:

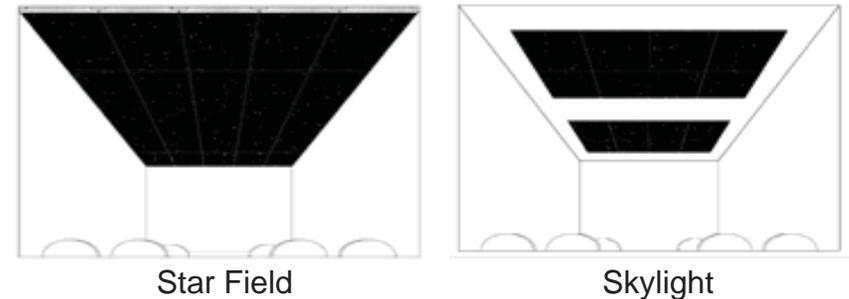

## 3. Before You Start

**WARNING:** disconnect power before beginning any electrical work, and do not exceed the capacity of the circuit.

Make sure all code requirements are fulfilled. If your home theater project is going to require an electrical permit, you will be subject to the local electrical code requirements. Though it's not always easy to tell if your project requires a permit, it is best to consult with your local permitting authority.

Electrical codes generally follow the National Electric Code (NEC), which is published by the National Fire Protection Association. The main purpose of the NEC is to prevent hazards to human health and safety from electrical shock, tendency to start or perpetuate a fire, and production of toxic fumes when exposed to fire.

### 3. Before You Start (continued)

Kinetics panels are made with “Class A” fiberglass covered in a “Class A” material and or fabric. Wiring harnesses are made from CL2 and CL3 or higher. If installing in a plenum, installer must supply CL2P, CL3P or CMP, and as always, confirm and conform to local codes before installing.

### 4. Packing List

Each Kinetics Panel ships with the following


Panel Size	Number of panels per Master Pack	Jumper Cables per Master	Powder Free Latex Gloves	Instructions
24"	6	6	2	1

\*\*\* First time installers should purchase an Installation Kit, especially if cut outs in the panels are required\*\*\*

### 5. Quick Installation Overview

- Put latex gloves on to keep panels clean when handling
- Orient first panel
- Install Leader Cable
- Turn on power
- Inspect to see that the stars are on
- Drop Panel into metal ceiling grid
- Panel installation complete
- For additional panels rotate and repeat


### 6. Running The Power

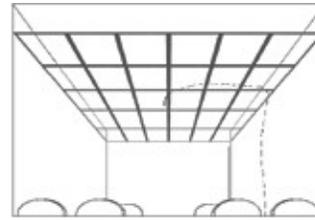

Based on site conditions and project design, generally you will have two options for power. The first recommended way is using a Remote Driver and preinstalling an Kinetics

Leader Cable, or pre-wire an 19 AWG wire. Second is to plug the Driver into a switched outlet located above the ceiling. As always, check and observe local building codes.

### 7. Connecting The Driver

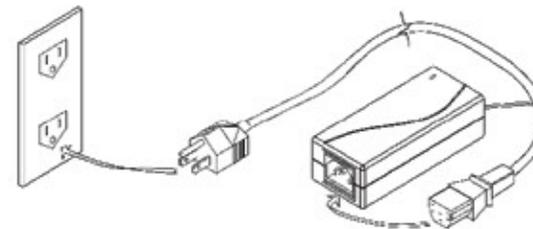


The plug-in Driver is a “table top” type of power supply, with an I. E. C. connector for the input of the line

voltage. The selected outlet for powering the Driver should be controlled from a remote switch, or control system. Locate the Driver in proper area that is accessible and within 30 feet of the first Kinetics star ceiling panel (generally in the center of the ceiling.) At this point, connect the Kinetics Leader Cable and start daisy chaining the panels together, (not to exceed 50 panels) using the supplied Jumper Cables. Your leader cable should not be longer than 30 feet. Consult with Kinetics if a longer leader cable is required.


## 8. Installation Techniques

Use the supplied “powder free” latex gloves when handling the panels and always use care in protecting the panels finish.

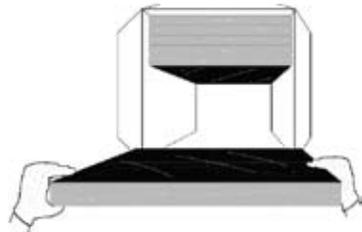


Handle the Panels along the edges as much as possible and keep hands clean to prevent finger marks on the face of the panels.

## 9. Laying The First Panel

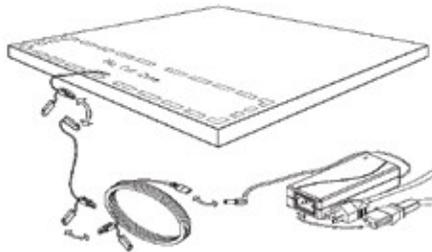


Connect the first panel to the Leader Cable. Inspect the front of the panel to see that the stars are illuminated.

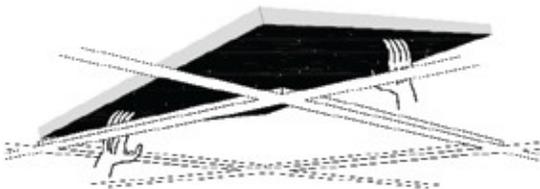

Rest the Drop-In Panels into position by tilting them slightly, lifting them above the framework and letting

them fall into place. When positioning the first panel, it is recommended to start from the center and work your way to the walls.

## 10. Rotate The Panels

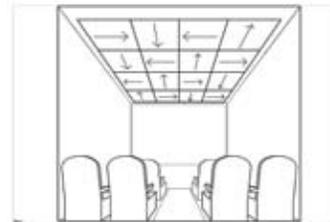

Each panel is marked with an arrow on the back. This arrow indicates the panels orientation. Every panel gets rotated one quarter turn in order to provide a more random starry night experience.


## 11. Installing Additional Panels



Connect a Jumper Cable to the first panel and connect it to the next panel. Up to 50 Kinetics Panels can be connected together in any configuration. If


your installation requires more than 50 Kinetics Panels, then add an additional Driver and Leader Cable.

Note: Do not exceed the capacity of the switched circuit.

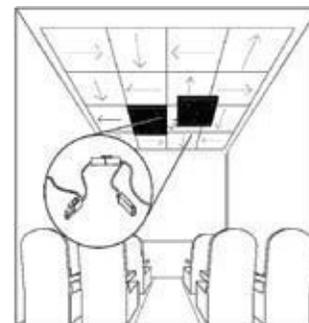

Remember to rotate panels 90° for random effect.

## 12. How To Cut A Drop-In Panel

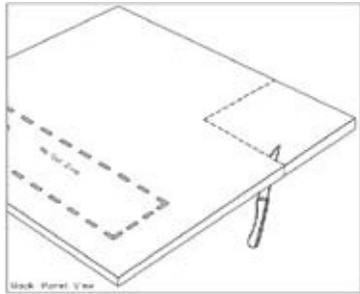

Caution: Each Kinetics Panel has a “No Cut Out Zone,” if necessary, rotate the panel in order to avoid the “No Cut Zone.”

Sometimes cuts will need to occur to the panels in order to accommodate down lights, vents, sprinkler heads, speakers, etc. This process is easy. Always make any cuts on the face of the panel first in order to keep the proper orientation. Panels are made of fiberglass and a painted face making them easy to cut. Avoid the “No Cut Zone” by rotating the panel.



If necessary, cut the border with knife. Make sure to cut the Drop-In Panel from the face side along the marked lines. Make sure to make your cuts straight up and down and not at an angle.

## 13. How To Use The Cut-Out Template



This template is a universal marking guide and cut-out stencil used for marking the center of a down-light, vent, speaker, or any hole that needs to be marked and cut in an Kinetics Panel.

## 13. How To Use The Cut-Out Template (cont.)


Secure the large thumbtack in the center of the Cut-Out Template using double sided tape. Then use double sided tape, or thumbtacks, to hold the template centered on the ceiling over the opening, or area you need to cut out. Properly align the panel and push it up into the thumbtack(s).



Take the panel down, note the location of the thumb tack mark on the back of the panel. From the backside, insert the awl all the way through so it marks the front of the panel. Mark the location of the hole on the face of the panel. Now flip the panel over so that it is black face side up. Place the template centered over the hole and insert the awl. Now you have the template such that it rotates around the awl. Note the circumference of the hole that is required (this hole should be slightly larger than what is required for the fixture opening, but smaller than the fixtures trim ring.) Place marker in the appropriate slot on the template, and slowly rotate the marker and template all the way around. Remove the awl, and template, and use the serrated knife to cut the two inches of insulation. Your perfectly located hole is done.

14. Now turn on the switch and gaze at the stars, Relax and Enjoy!

# Product Specification

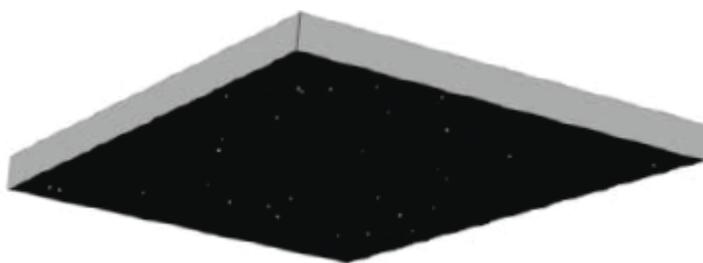

Kinetics Drop-In Panels are manufactured with 2" of 3 lb. density acoustic fiberglass for a greater than 1.0 noise reduction coefficient. These panels have unfinished square edges and are intended to be used in standard "T bar" or "grid" ceiling configurations, and have the preferred non-glare, matte black finish.

Kinetics also offers the same Drop-In Panel in a standard 1" thick version with no stars.

Model Number	Star-2424LI-CIN-08	Star-4848LI-CIN-08
Size	24" x 24" x 2"	48" x 48" x 2"
Color	Matte Black	Matte Black
Star Color Temp.	6500 K	6500 K
Number of Stars	18	45
Stars per sq. ft.	3.75	3.75
Weight	2 lbs .	2 lb.
Power Requirement	12v DC	12v DC
Power Consumption	0.36w	0.36w
Fiber Glass	3 lb. density	3 lb. density
Noise Reduction Coefficient	> 1.0 N.R .C .	> 1.0 N.R .C .
Mounting	Drop- In/Lay In	Drop- In/Lay In

Each panel has an 8" No Cut Zone clearly marked on the back

All other brands or product names are trademarks or registered trademarks of their respective owners. Specifications are subject to change without notice. Kinetics strives to use only materials that carry ASTM E 84 Class A or 1 fire rating. Low voltage lighting — not all materials carry an independent lab listing.

